


IMARK

PRODUCT DESCRIPTION

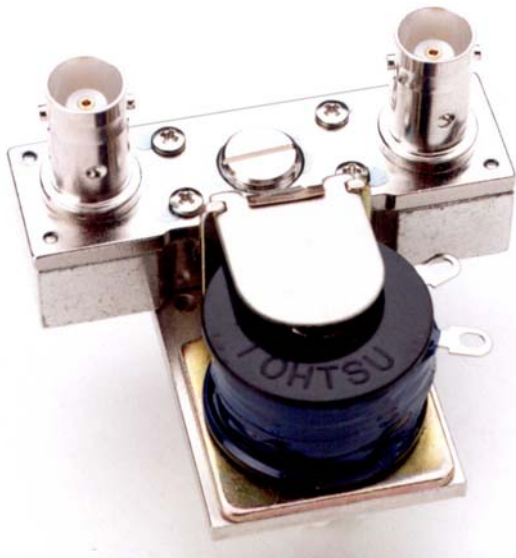

CX-530D

TOHTSU COAXIAL RELAY

SPDT 12 Volt Coaxial Relay with one "N" Type & 2 BNC Connectors

Imark Stock # [851402](#)

Features:

- Compact Size
- Operates up to 2.0 GHz
- Low Loss
- Low VSWR
- Good Isolation
- High Power Capability
- 12 Volt Operation
- 24 Volt or 48 Volt versions available

DESCRIPTION:

The Tohtsu CX-530D Coaxial Relay is specifically designed for switching RF feed paths in two-way radio applications, but can also be used in LAN applications. They are designed for internal fitment within radio equipment but can be remotely mounted nearer the antenna if required. It is fitted with one "N" Type connector (COM) and two BNC Connectors (NO & NC). Switching is achieved by applying 12 Volts DC to the Coil. The Tohtsu CX-530D Coaxial Relays feature low loss, good VSWR, and good isolation characteristics.

SPECIFICATIONS:	
COIL	
Actuation Voltage	9Vdc - 16.5Vdc (12 Volts DC Nominal)
Current Requirement	160mA @ 12 Vdc 20°C
Coil Resistance	75Ω ±10% 20°C
Switching Time	20mS (Pull In) Max, 15mS (Drop Out) Max
SWITCHING CIRCUIT	
Circuit Type	SPDT
Switching Circuit Impedance	50Ω
Voltage Standing Wave Ratio	Less than 1.2:1 @ 2.0GHz
Isolation	>65dB @ 50 MHz >39dB @ 2.0GHz
Insertion Loss	<0.1dB @ 50 MHz <0.25dB @ 2.0 GHz
Maximum Input Power	350 Watts @ 50 MHz 150 Watts @ 2.0GHz
Crosstalk	76dB @ 300 MHz to 51 dB @ 1.0 GHz
Connector Type	1 x "N" Type & 2 x BNC Connectors
MECHANICAL & PHYSICAL	
Life Expectancy	500,000 Operations Minimum
Operational Temperature	-25°C to + 50°C
Mounting Requirements	4 pieces M3 Screws (Not Supplied)
Overall Unit Dimensions	58(W) x 52(D) x 53(H) mm
Shipping Dimensions	108(W) x 78(D) x 70(H) mm
Unit Weight	200 grams
Shipping Weight	260 grams
Inclusions	Relay Unit, Instruction Sheet
Approvals	
Imark Stock #	851402
Options	24Vdc version, 48Vdc versions available on special order